


## TBX FITTING

CODO RL 90° ASTM A-234

**USO:** En aplicaciones de piping, se utiliza para cambiar la dirección de fluidos.

**PROPIEDADES:** Alta resistencia, adaptabilidad a temperaturas extremas, excelente soldabilidad.

**DIAMETROS:** Desde 1/2" hasta 36"

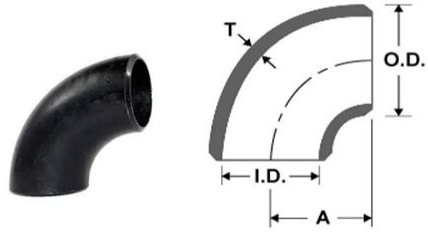

NPS	O.D.	A	Schedule STD		Schedule 80	
			T	Peso	T	Peso
				Aprox.		Aprox.
mm.	mm.	mm.	Kg/Und.	mm.	Kg/Und.	
1/2"	21.3	38.1	2.77	0.08	3.73	0.18
3/4"	26.7	28.6	2.87	0.08	3.91	0.20
1"	33.4	38.1	3.38	0.15	4.55	0.20
1.1/4"	42.2	47.6	3.56	0.25	4.85	0.35
1.1/2"	48.3	57.2	3.68	0.36	5.08	0.60
2"	60.3	76.2	3.91	0.65	5.54	0.94
2.1/2"	73.0	95.3	5.16	1.28	7.01	1.70
3"	88.9	114.3	5.49	2.03	7.62	2.75
4"	114.3	152.4	6.02	3.90	8.56	5.40
6"	168.3	228.6	7.11	10.20	10.97	15.35
8"	219.1	304.8	8.18	20.30	12.70	29.90
10"	273.0	381.0	9.27	37.00	12.70	48.60
12"	323.9	457.2	9.53	54.00	17.48	94.82
14"	355.6	533.4	9.53	68.00	19.05	132.16
16"	406.4	609.6	9.53	89.20	21.44	204.30
18	457.0	686.0	9.53	112.90	23.83	287.84
20	508.0	762.0	9.53	142.40	26.18	390.00
22	559.0	838.0	9.53	178.00	28.58	523.40
24	610.0	914.0	9.53	202.00	30.96	667.40
26	660.0	991.0	9.53	270.00		
28	711.0	1,067.0	9.53	300.00		
30	762.0	1,143.0	9.53	333.00		
32	813.0	1,219.0	9.53	390.00		
36	914.0	1,372.0	9.53	482.00		