


TBX FITTING

TAPAGORRO ASTM A-234

USO: En aplicaciones de piping, se utiliza para cerrar sistemas de fluidos.

PROPIEDADES: Alta resistencia, adaptabilidad a temperaturas extremas, excelente soldabilidad.

DIAMETROS: Desde 1" hasta 24"

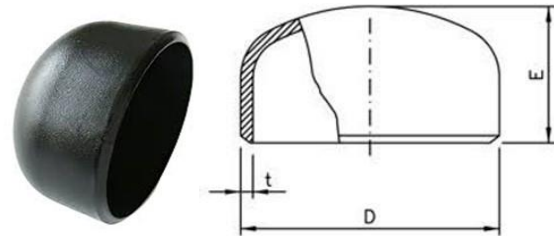

NPS	D	E	Schedule STD		Schedule 80	
			t	Peso Aprox.	t	Peso Aprox.
	mm.	mm.	mm.	Kg/Und.	mm.	Kg/Und.
1/2"	21.3	25.4	2.77	0.03	3.73	0.05
3/4"	26.7	25.0	2.87	0.06	3.91	0.10
1"	33.4	38.0	3.38	0.10	4.55	0.13
1 1/4"	42.2	38.0	3.56	0.14	4.85	0.20
1 1/2"	48.3	38.0	3.68	0.20	5.08	0.23
2"	60.3	38.0	3.91	0.30	5.54	0.30
2 1/2"	73.0	38.0	5.16	0.50	7.01	0.50
3"	88.9	51.0	5.49	0.70	7.62	0.90
4"	114.3	64.0	6.02	1.60	8.56	2.00
5"	141.0	76.0	6.55	2.30	9.52	3.00

6"	168.3	89.0	7.11	3.60	10.97	4.00
8"	219.1	102.0	8.18	5.50	12.70	8.40
10"	273.0	127.0	9.27	10.00	15.09	16.20
12"	323.9	152.0	9.52	15.00	17.48	26.90
14"	355.6	165.0	9.52	17.00	19.05	34.70
16"	406.4	178.0	9.52	23.00	21.44	43.50
18"	457.0	203.0	9.52	29.00	23.83	72.50
20"	508.0	229.0	9.52	36.00	26.18	98.50
22"	559.0	254.0	9.52	42.00	28.58	120.00
24"	610.0	267.0	9.52	52.00	30.96	150.00